

Heat-shrink breakouts, PT type

FEATURES & BENEFITS

- ✓ breakouts securing multi-conductor cable ends
- ✓ protects cable ends against mechanical impact and moisture penetration
- ✓ hot melt adhesive ensures very good insulation tightness in humid environments
- ✓ UV resistant and halogen-free


Used as branching boxes for 0.6/1 kV power cables

MECHANICAL DATA

Material	cross linked polyolefin with hot melt adhesive
Halogen-free	yes
UV Resistance	yes
Recommended shrinking temperature [°C]	100 ÷ 125
Operating temperature [°C]	-25 ÷ +110
Shrinkage factor	3:1
Colour	black

ELECTRICAL DATA

Breakdown strength [kV/mm]	12
----------------------------	----

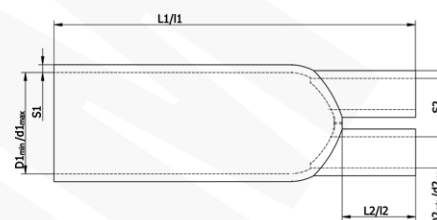

Type	Index Ergom	Number of cores	D1 _{min}	d1 _{max}	D2 _{min}	d2 _{max}	L1	I1	L2	I2	S1	S2	Quantity in package [pcs]
PT-2 6-25 (10 PCS)	E05ME-01060100103	2	31	10	13	4	70	85	15	20	2,2	2,0	10
PT-2 25-150 (10 PCS)	E05ME-01060100183	2	60	20	24	7	96	120	23	32	3,5	2,7	10
PT-3 16-35 (10 PCS)	E05ME-01060100203	3	35	14	14	4	80	100	15	21	2,2	2,0	10
PT-3 35-150 (10 PCS)	E05ME-01060100303	3	60	20	25	8	160	188	45	62	3,7	2,8	10
PT-4 1,5-10 (10 PCS)	E05ME-01060100563	4	27	9	8	3	60	76	18	24	2,8	2,5	10
PT-4 2,5-10 (10 PCS)	E05ME-01060100583	4	40	12	12	3	80	100	15	25	2,4	1,7	10
PT-4 6-35 (10 PCS)	E05ME-01060100603</												