

Copper pin terminals, BMV type

FEATURES & BENEFITS

- ✓ long Cu pin, crimped part as per DIN, without galvanic plating
- ✓ description of cable cross-section, crimping die number on crimped part surface
- ✓ facilitates disconnection after loosening screws in terminal

LOGISTIC DATA

Quantity in package [pcs] 1

MECHANICAL DATA

Material Cu
Surface uncoated

DIMENSIONS


L_2 125
 D_2 20

CERTIFICATES & STANDARDS

Design DIN 46267 Part 1 – concerns diameters the tubular part

NOTE!

Sector-shaped conductors (sm) must be rounded with special dies.

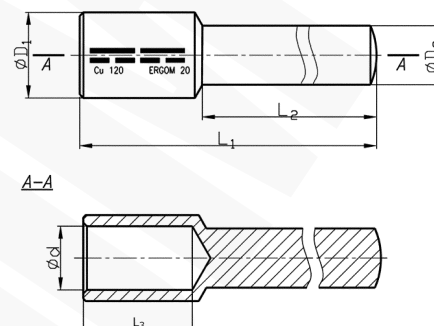

Type	Index Ergom	Cross-section, rm/ sm [mm ²]	Cross-section, re/ se [mm ²]	d	L_1	L_3	D_1	Socket code no.	Lz/s	Lz/w	Weight [kg]
BMV 35	E11KM-02120100100	35	50	8,2	165	20	12,5	12	2	4	0,37
BMV 50	E11KM-02120100200	50	70	10,0	165	28	14,5	14	2	4	0,38
BMV 70	E11KM-02120100300	70	95	11,5	165	28	16,5	16	2	4	0,39
BMV 95	E11KM-02120100400	95	120	13,5	165	35	19,0	18	2	4	0,39
BMV 120	E11KM-02120100500	120	150	15,5	165	35	21,0	20	2	4	0,41
BMV 150	E11KM-02120100600	150	185	17,0	165	40	23,5	22	2	4	0,45
BMV 185	E11KM-02120100700	185	240	19,0	170	42	25,5	25	2	5	0,53
BMV 240	E11KM-02120100810	240	300	21,5	185	42	29,0	28	3	5	0,54

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow