

Fully insulated receptacles, GCI...PCV type

FEATURES & BENEFITS


-  receptacle with long PVC insulating sleeve, with Cu sleeve inside, for double crimping
-  insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
-  sleeve colours facilitate cross-section identification

LOGISTIC DATA

Quantity in package [pcs]	100
---------------------------	-----

MECHANICAL DATA

Insulation	polyvinyl chloride (PVC)
Material	brass
Surface	tin-plated
Operating temperature [°C]	-5 ÷ +60

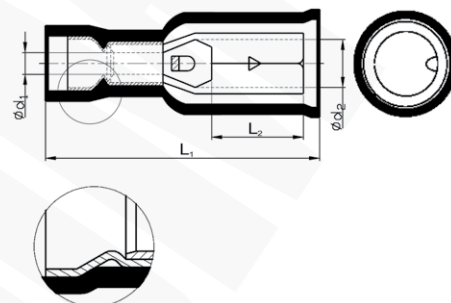

Type	Index Ergom	Cross-section [mm²]	Insulation colour	L ₁	L ₂	d ₁	d ₂	Weight [kg]
GCI 1/4 PCV (100 PCS)	E10KN-03030300101	0,75+1	red	25,0	7,3	1,7	3,9	0,11
GCI 2,5/4 PCV (100 PCS)	E10KN-03030300201	1,5+2,5	blue	25,0	7,3	2,3	3,9	0,13
GCI 2,5/5 PCV (100 PCS)	E10KN-03030300301				8,5		4,9	0,14
GCI 6/5 PCV (100 PCS)	E10KN-03030300401	4+6	yellow	28,0	8,5	3,4	4,9	0,21