

Longitudinally sealed tubular cable lugs, KRMC type

FEATURES & BENEFITS



ring cable lug Cu, longitudinally sealed, crimped part as per DIN, with galvanic tin plating



description of cable cross-section, cable lug size and crimping die number on crimped part surface



for most demanding connections

LOGISTIC DATA

Quantity in package [pcs] 1

MECHANICAL DATA

Material Cu



Surface tin-plated

CERTIFICATES & STANDARDS

Design DIN 46235 – concerns only the tubular part

NOTE!

Sector-shaped conductors (sm) must be rounded with special dies.

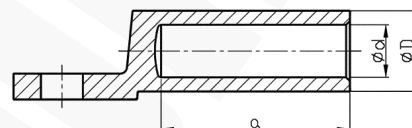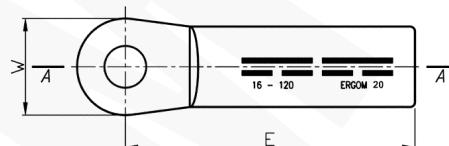

Type	Index Ergom	Cross-section, mm ² /sm [mm ²]	d	D	a	E	W	Screw hole	Socket code no.	Lz/s	Lz/w	Weight [kg]
KRMC 16/10	E11KM-02050200300	16	5,5	8,5	21	36	20	M10	8	1	2	0,02
KRMC 70/12	E11KM-02050201701	70	11,5	16,5	29	53	30	M12	16	2	3	0,08
KRMC 150/16	E11KM-02050202500	150	17,0	23,5	36	63	30	M16	22	2	4	0,16

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow