

Longitudinally sealed tubular cable lugs, KRM type

FEATURES & BENEFITS

-  ring cable lug Cu, longitudinally sealed, crimped part as per DIN, without galvanic tin plating
-  description of cable cross-section, cable lug size and crimping die number on crimped part surface
-  for most demanding applications, if tin plating not required

LOGISTIC DATA

Quantity in package [pcs] 1

MECHANICAL DATA



Material Cu
Surface uncoated

CERTIFICATES & STANDARDS

Design DIN 46235 – concerns only the tubular part

NOTE!

Sector-shaped conductors (sm) must be rounded with special dies.

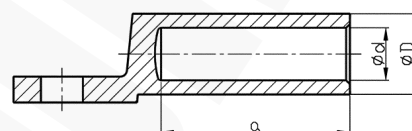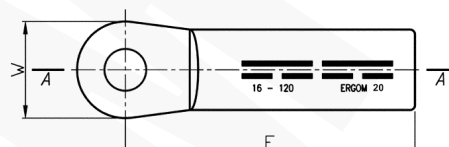

Type	Index Ergom	Cross-section, rm/ sm [mm²]	d	D	a	E	W	Screw hole	Socket code no.	Lz/s	Lz/w	Weight [kg]
KRM 25/6	E11KM-02050100501	25	7,0	10,0	21	33	20	M6	10	1	2	0,03
KRM 25/10	E11KM-02050100701						24	M10				
KRM 25/12	E11KM-02050100801						24	M12				
KRM 50/10	E11KM-02050101401	50	10,0	14,5	29	50	25	M10	14	2	3	0,05
KRM 50/12	E11KM-02050101501							M12				0,04
KRM 70/16	E11KM-02050101801	70	11,5	16,5	29	53	30	M16	16	2	3	0,08
KRM 95/10	E11KM-02050101901	95	13,5	19,0	36	57	25	M10	18	2	4	0,09
KRM 120/12	E11KM-02050102201	120	15,5	21,0	36	62	30	M12	20	2	4	0,13
KRM 150/16	E11KM-02050102501	150	17,0	23,5	36	63	30	M16	22	2	4	0,16
KRM 185/10	E11KM-02050102601	185	19,0	25,5	42	71	30	M10	25	2	5	0,19
KRM 185/12	E11KM-02050102701							M12				
KRM 185/20	E11KM-02050102901							M20				
KRM 240/12	E11KM-02050103001	240	21,5	29,0	42	74	38	M12	28	2	-	0,23
KRM 240/20	E11KM-02050103201							M20				0,22
KRM 300/20	E11KM-02050103401	300	24,5	32,0	63	89	38	M20	32	2	-	0,37

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow