

Tubular cable lugs, KDM type

FEATURES & BENEFITS

- ☒ ring cable lug Cu, as per DIN, without galvanic tin plating
- ☒ description of cable cross-section, cable lug size and crimping die number on crimped part surface
- ☒ for demanding applications
- ☒ very wide range

MECHANICAL DATA


Material	Cu
Surface	uncoated

CERTIFICATES & STANDARDS

Design	DIN 46235
--------	-----------

NOTE!

Sector-shaped conductors (sm) must be rounded with special dies.

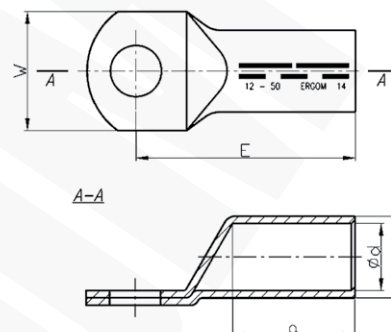

Type	Index Ergom	Cross-section, mm ²	d	D	a	E	W	Screw hole	DIN	Socket code no.	Lz/s	Lz/w	Quantity in package [pcs]	Weight [kg]
KDM 10/5 (100 PCS)	E11KM-02010100100	10	4,5	6,0	12	27	9	M5	√	6	-	1	100	0,4
KDM 10/6 (100 PCS)	E11KM-02010100200							M6						0,45
KDM 10/8 (100 PCS)	E11KM-02010100300						13	M8	-					0,4
KDM 10/10 (100 PCS)	E11KM-02010100350						15	M10	-					
KDM 16/6 (100 PCS)	E11KM-02010100400	16	5,5	8,5	20	36	13	M6	√	8	1	2	100	1,3
KDM 16/8 (100 PCS)	E11KM-02010100500							M8						1,4
KDM 16/10 (100 PCS)	E11KM-02010100600						17	M10	-					
KDM 16/12 (100 PCS)	E11KM-02010100700						38	M12	-					
KDM 25/6 (100 PCS)	E11KM-02010100800	25	7,0	10,0	20	38	14	M6	√	10	1	2	100	1,65
KDM 25/8 (100 PCS)	E11KM-02010100900						16	M8						
KDM 25/10 (100 PCS)	E11KM-02010101000						17	M10						
KDM 25/12 (100 PCS)	E11KM-02010101100						19	M12	-					
KDM 25/14 (100 PCS)	E11KM-02010101200	35	8,2	12,5	20	40	21	M14	-	12	1	2	100	1,9
KDM 25/16 (100 PCS)	E11KM-02010101300					45	25	M16	-					1,8
KDM 35/6 (100 PCS)	E11KM-02010101400					42	17	M6	-					3
KDM 35/8 (100 PCS)	E11KM-02010101500							M8	√					3,1
KDM 35/10 (100 PCS)	E11KM-02010101600						19	M10						
KDM 35/12 (100 PCS)	E11KM-02010101700						21	M12	-					
KDM 35/14 (100 PCS)	E11KM-02010101800	50	10,0	14,5	28	44	23	M14	-	14	2	3	100	3,3
KDM 35/16 (100 PCS)	E11KM-02010101900					45	28	M16	√					4,38
KDM 50/8 (100 PCS)	E11KM-02010102000					52	20	M8						4,7
KDM 50/10 (100 PCS)	E11KM-02010102100						22	M10	-					4,75
KDM 50/12 (100 PCS)	E11KM-02010102200						24	M12	-					4,7
KDM 50/14 (100 PCS)	E11KM-02010102300						26	M14	√					4,6
KDM 50/16 (100 PCS)	E11KM-02010102400						28	M16						

Type	Index Ergom	Cross-section, mm ²	d	D	a	E	W	Screw hole	DIN	Socket code no.	Lz/s	Lz/w	Quantity in package [pcs]	Weight [kg]
KDM 70/8 (100 PCS)	E11KM-02010102500	70	11,5	16,5	28	55		M8		16	2	3	100	6
KDM 70/10 (100 PCS)	E11KM-02010102600						24	M10	√					6,3
KDM 70/12 (100 PCS)	E11KM-02010102700							M12						6,4
KDM 70/14 (100 PCS)	E11KM-02010102800						26	M14	—					6,55
KDM 70/16 (100 PCS)	E11KM-02010102900						30	M16	√					6,2
KDM 70/20 (100 PCS)	E11KM-02010103000						35	M20	—					6,65
KDM 95/8 (50 PCS)	E11KM-02010103100	95	13,5	19,0	35	65		M8	—	19	2	4	50	4,6
KDM 95/10 (50 PCS)	E11KM-02010103200						28	M10	√	4,8				
KDM 95/12 (50 PCS)	E11KM-02010103300							M12		4,7				
KDM 95/14 (50 PCS)	E11KM-02010103400						30	M14	—	4,8				
KDM 95/16 (50 PCS)	E11KM-02010103500						32	M16	√	4,75				
KDM 95/20 (50 PCS)	E11KM-02010103600						69	M20	—					
KDM 120/10 (50 PCS)	E11KM-02010103700	120	15,5	21,0	35	70		M10	√	20	2	4	50	5,7
KDM 120/12 (50 PCS)	E11KM-02010103800							M12						5,65
KDM 120/14 (50 PCS)	E11KM-02010103900						32	M14	—					5,75
KDM 120/16 (50 PCS)	E11KM-02010104000							M16	√					5,6
KDM 120/20 (50 PCS)	E11KM-02010104100						38	M20	√					5,8
KDM 150/10 (50 PCS)	E11KM-02010104200						150	17,0	23,5					40
KDM 150/12 (50 PCS)	E11KM-02010104300		M12		8,1									
KDM 150/14 (50 PCS)	E11KM-02010104400	34	M14	—	8,2									
KDM 150/16 (50 PCS)	E11KM-02010104500		M16	√	8									
KDM 150/20 (50 PCS)	E11KM-02010104600	40	M20	√	8,2									
KDM 185/10 (50 PCS)	E11KM-02010104700	185	19,0	25,5	42	82					M10	√	25	
KDM 185/12 (50 PCS)	E11KM-02010104800							M12		9,4				
KDM 185/14 (50 PCS)	E11KM-02010104900						37	M14	—	9,25				
KDM 185/16 (50 PCS)	E11KM-02010105000							M16	√	9,3				
KDM 185/20 (50 PCS)	E11KM-02010105100						40	M20	√	13,9				
KDM 240/10 (50 PCS)	E11KM-02010105150						240	21,5	29,0	42	92			M10
KDM 240/12 (50 PCS)	E11KM-02010105200		M12	√	13,5									
KDM 240/14 (50 PCS)	E11KM-02010105300	42	M14	—	13,6									
KDM 240/16 (50 PCS)	E11KM-02010105400		M16	√	13,8									
KDM 240/20 (50 PCS)	E11KM-02010105500	45	M20	√	3,34									
KDM 300/10 (10 PCS)	E11KM-02010105552	300	24,5	32,0	52	100							M10	—
KDM 300/12 (10 PCS)	E11KM-02010105602							M12	—	3,4				
KDM 300/14 (10 PCS)	E11KM-02010105702						48	M14	—	3,42				
KDM 300/16 (10 PCS)	E11KM-02010105802							M16	√	3,4				
KDM 300/20 (10 PCS)	E11KM-02010105902							M20	√	0,68				
KDM 400/12	E11KM-02010105952						400	27,5	38,5	70	115	55	M12	—
KDM 400/14	E11KM-02010106002	M14	—	0,64										
KDM 400/16	E11KM-02010106102	M16	√	0,82										
KDM 400/20	E11KM-02010106202	M20	√	0,8										
KDM 500/12	E11KM-02010106252	500	31,0	42,0	70	125	60	M12	—	42	3	-	1	0,78
KDM 500/14	E11KM-02010106302							M14	—					0,76
KDM 500/16	E11KM-02010106402							M16	√					0,94
KDM 500/20	E11KM-02010106502							M20	√					0,92
KDM 625/12	E11KM-02010106552	625	34,5	44,0	81	135	63	M12	—	44	3	-	1	0,9
KDM 625/14	E11KM-02010106602							M14	—					0,88
KDM 625/16	E11KM-02010106702							M16	√					
KDM 625/20	E11KM-02010106802							M20	√					

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow