

Tubular spade cable lugs, KWR type

FEATURES & BENEFITS

- ☒ spade cable lug Cu, standard, with galvanic tin plating
- ☒ description of cable cross-section and cable lug size on palm surface
- ☒ other designs on client's request

LOGISTIC DATA

Quantity in package [pcs] 100

MECHANICAL DATA

Material Cu
Surface tin-plated

CRIMPING SHAPE

Number of crimping - narrow 1


CERTIFICATES & STANDARDS

Design standard

NOTE!

Sector-shaped conductors (sm) must be rounded with special dies.

For crimping cable lugs on cables of 5 class conductors (from cross-section of 10 mm²), we recommend crimping in a "hexagon with fangs" using KP22-FL type dies.

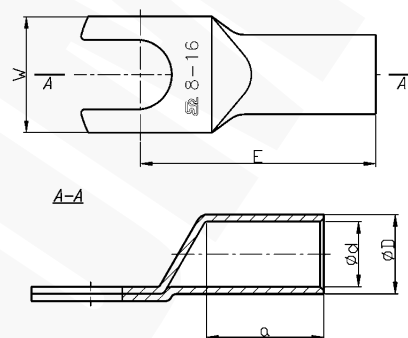

Type	Index Ergom	Cross-section, mm ²	d	D	a	E	W	Screw hole	Socket code no. - 2 class	Socket code no. - 5 class	Lz/s	Weight [kg]
KWR 0,75/4 (100 PCS)	E11KM-01030100200	0,75	1,3	2,8	6	13,0	6,5	M4	-	-	-	0,06
KWR 0,75/5 (100 PCS)	E11KM-01030100300					15,0	7,5	M5				
KWR 4/4 (100 PCS)	E11KM-01030101300	4	3,0	5,0	8	17,0	8,5	M4	-	-	-	0,21
KWR 4/6 (100 PCS)	E11KM-01030101500					19,0	10,0	M6				0,23
KWR 10/5 (100 PCS)	E11KM-01030102200	10	4,5	7,0	10	21,0	12,0	M5	7	FL10	1	0,5
KWR 10/6 (100 PCS)	E11KM-01030102300					21,5		M6				0,48
KWR 10/8 (100 PCS)	E11KM-01030102400					23,5	15,0	M8				0,5
KWR 10/10 (100 PCS)	E11KM-01030102500					25,5	17,0	M10				0,55
KWR 16/5 (100 PCS)	E11KM-01030102600					25,0	12,0	M5	8	FL16	1	0,8
KWR 16/6 (100 PCS)	E11KM-01030102700	16	5,5	8,5	13	25,5		M6				0,82
KWR 16/8 (100 PCS)	E11KM-01030102800					27,5	15,0	M8				0,9
KWR 16/10 (100 PCS)	E11KM-01030102900					29,5	17,0	M10				0,98

Lz/s - Number of crimping - wide