

Non-tension compression tubular cable connectors with barrier, LMWP... type

FEATURES & BENEFITS

-  connector Cu, longitudinally sealed, crimped part as per DIN, not mechanically loaded
-  description of cable cross-section, crimping die number on crimped part surface
-  connector shape ensures more even electrical field distribution
-  wide range of solutions facilitating connection of cables of the same diameters

LOGISTIC DATA

Quantity in package [pcs] 10

MECHANICAL DATA


Material Cu
Surface uncoated

CERTIFICATES & STANDARDS

Design DIN 46267 Part 1 – concerns diameters the tubular part

NOTE!

Sector-shaped conductors (sm) must be rounded with special dies.

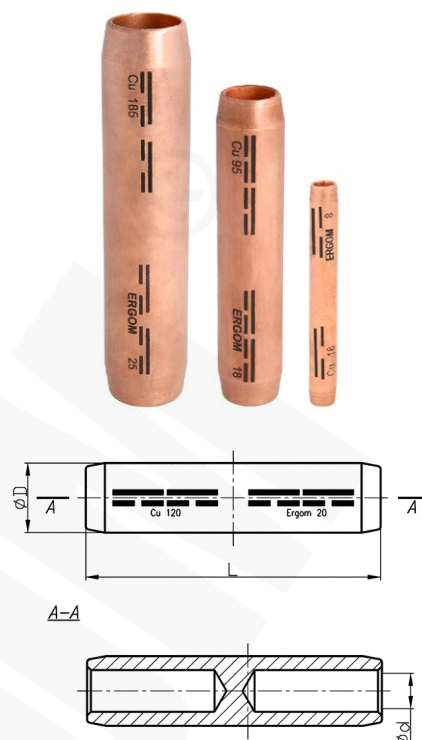

ERC

RoHS
Compliance

REACH
Compliance

Type	Index Ergom	Cross-section, rm/ sm [mm²]	d	D	L	Socket code no.	Lz/s	Lz/w	Weight [kg]
LMWP 16 (10 PCS)	E11KM-02100300102	16	5,5	8,5	65	8	1 - 1	2 - 2	0,2
LMWP 25 (10 PCS)	E11KM-02100300202	25	7,0	10,0	65	10	1 - 1	2 - 2	0,2
LMWP 35 (10 PCS)	E11KM-02100300302	35	8,2	12,5	65	12	1 - 1	2 - 2	0,3
LMWP 50 (10 PCS)	E11KM-02100300402	50	10,0	14,5	75	14	1 - 1	3 - 3	0,6
LMWP 70 (10 PCS)	E11KM-02100300502	70	11,5	16,5	75	16	1 - 1	3 - 3	0,8
LMWP 95 (10 PCS)	E11KM-02100300602	95	13,5	19,0	91	18	2 - 2	4 - 4	1,2
LMWP 120 (10 PCS)	E11KM-02100300702	120	15,5	21,0	91	20	2 - 2	4 - 4	1,4
LMWP 150 (10 PCS)	E11KM-02100300802	150	17,0	23,5	105	22	2 - 2	4 - 4	2,1
LMWP 185 (10 PCS)	E11KM-02100300902	185	19,0	25,5	115	25	2 - 2	4 - 4	2,5
LMWP 240 (10 PCS)	E11KM-02100301002	240	21,5	29,0	115	28	2 - 2	5 - 5	3,5

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow