

FEATURES & BENEFITS



X-shaped connector Cu, standard, with galvanic tin plating



not mechanically loaded

LOGISTIC DATA

Quantity in package [pcs] 1

MECHANICAL DATA

Material Cu

Surface tin-plated


CERTIFICATES & STANDARDS

Design standard

NOTE!

Sector-shaped conductors must be rounded with special dies.

For crimping connectors on cables of 5 class conductors, we recommend crimping in a "hexagon with fangs" using KP22-FL type dies.

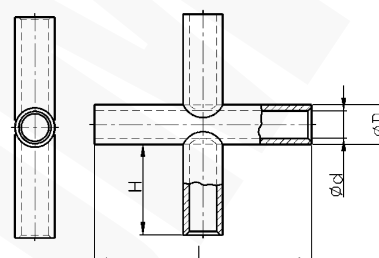

Type	Index Ergom	Cross-section, mm ²	d	D	L	H	Socket code no. - 2 class	Socket code no. - 5 class	Lz/s	Lz/w	Weight [kg]
KX 10	E11KM-01080200202	10	4,5	7,0	35	14	7	FL10	1	1	0,02
KX 16	E11KM-01080200302	16	5,5	8,5	50	21	8	FL16	1	1	0,03
KX 25	E11KM-01080200402	25	7,0	10,0	55	23	10	FL25	1	2	0,04
KX 35	E11KM-01080200502	35	8,5	12,0	70	30	12	FL35	1	2	0,07
KX 50	E11KM-01080200602	50	10,0	14,0	80	34	14	FL50	1	3	0,1
KX 70	E11KM-01080200702	70	12,0	16,5	85	35	16	FL70	1	3	0,13
KX 95	E11KM-01080200802	95	13,5	18,0	90	36	17	FL95	2	4	0,16
KX 120	E11KM-01080200902	120	15,0	19,5	95	38	19	FL120	2	4	0,19
KX 150	E11KM-01080201002	150	16,5	21,0	110	44	20	FL150	2	4	0,26
KX 185	E11KM-01080201102	185	19,0	24,0	115	45	23	FL185	2	4	0,32
KX 240	E11KM-01080201202	240	21,0	26,0	130	52	25	FL240	2	4	0,4
KX 300	E11KM-01080201312	300	24,0	30,0	170	70	28	FL300	2	6	0,5

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow