

Fully insulated push-on female connectors, NCI...PCV type

FEATURES & BENEFITS


-  female push-on connector with long PVC insulating sleeve, with Cu sleeve inside, for double crimping
-  insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
-  sleeve colours facilitate cross-section identification

LOGISTIC DATA

Quantity in package [pcs]	100
---------------------------	-----

MECHANICAL DATA

Insulation	polyvinyl chloride (PVC)
Material	brass
Surface	tin-plated
Operating temperature [°C]	-5 ÷ +60

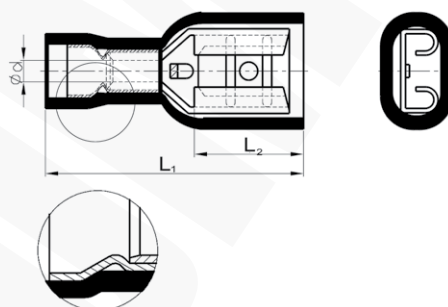

ERC

Type	Index Ergom	Cross-section [mm²]	Insulation colour	Size	d	L ₁	L ₂	Weight [kg]
NCI 2,8-1/0,5 PCV (100 PCS)	E10KN-03010302001	0,75+1	red	2,8x0,5	1,7	20,0	6,5	0,09
NCI 2,8-1/0,8 PCV (100 PCS)	E10KN-03010302101			2,8x0,8				
NCI 4,8-1/0,5 PCV (100 PCS)	E10KN-03010302401			4,8x0,5		20,5		0,1
NCI 4,8-1/0,8 PCV (100 PCS)	E10KN-03010302501			4,8x0,8				
NCI 6,3-1/0,8 PCV (100 PCS)	E10KN-03010302801			6,3x0,8		22,0		7,2
NCI 2,8-2,5/0,5 PCV (100 PCS)	E10KN-03010302201	1,5+2,5	blue	2,8x0,5	2,3	20,0	6,5	0,09
NCI 2,8-2,5/0,8 PCV (100 PCS)	E10KN-03010302301			2,8x0,8				
NCI 4,8-2,5/0,5 PCV (100 PCS)	E10KN-03010302601			4,8x0,5				0,1
NCI 4,8-2,5/0,8 PCV (100 PCS)	E10KN-03010302701			4,8x0,8				
NCI 6,3-2,5/0,8 PCV (100 PCS)	E10KN-03010302901			6,3x0,8		22,0		7,2
NCI 6,3-6/0,8 PCV (100 PCS)	E10KN-03010303001	4÷6	yellow	6,3x0,8	3,4	24,0	7,2	0,19
NCI 9,5-6/1,2 PCV (100 PCS)	E10KN-03010303101			9,5x1,2	3,3	30,5	12,0	0,3