

Insulated male push-on connectors, WI type

FEATURES & BENEFITS


- ☒ male push-on connector with polyamide insulating sleeve, with Cu sleeve inside, for double crimping
- ☒ insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk, facilitates cable installation
- ☒ sleeve colours facilitate cross-section identification
- ☒ to operate in wider temperature ranges than terminals with PVC insulation

LOGISTIC DATA

Quantity in package [pcs]	100
---------------------------	-----

MECHANICAL DATA

Insulation	polyamide 6.6
Material	brass
Surface	tin-plated
Operating temperature [°C]	-30 ÷ +95

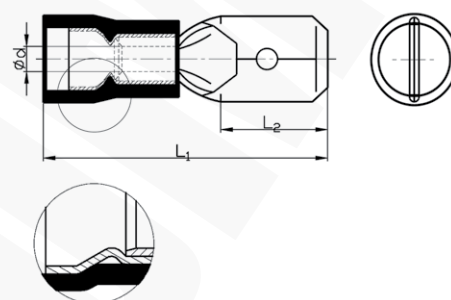

ERC

Type	Index Ergom	Cross-section [mm²]	Insulation colour	Size	d	L ₁	L ₂	Weight [kg]
WI 2,8-1/0,5 (100 PCS)	E10KN-03020100101	0,75+1	red	2,8x0,5	1,7	19,4	6,5	0,04
WI 2,8-1/0,8 (100 PCS)	E10KN-03020100201			2,8x0,8				0,05
WI 4,8-1/0,5 (100 PCS)	E10KN-03020100301			4,8x0,5		19,9	6,7	0,06
WI 4,8-1/0,8 (100 PCS)	E10KN-03020100401			4,8x0,8				0,07
WI 6,3-1/0,8 (100 PCS)	E10KN-03020100701	1,5+2,5	blue	6,3x0,8	2,3	22,0	7,7	0,09
WI 4,8-2,5/0,5 (100 PCS)	E10KN-03020100501			4,8x0,5		19,9	6,7	0,08
WI 4,8-2,5/0,8 (100 PCS)	E10KN-03020100601			4,8x0,8				0,09
WI 6,3-2,5/0,8 (100 PCS)	E10KN-03020100801			6,3x0,8		22,0	7,7	0,1
WI 6,3-6/0,8 (100 PCS)	E10KN-03020100901	4+6	yellow	6,3x0,8	3,4	24,0	7,7	0,16