

Insulated male push-on connectors, WI...PCV type

FEATURES & BENEFITS


- ✓ male push-on connector with polyamide insulating sleeve, with Cu sleeve inside, for double crimping
- ✓ insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- ✓ sleeve colours facilitate cross-section identification

LOGISTIC DATA

Quantity in package [pcs] 100

MECHANICAL DATA

Insulation	polyvinyl chloride (PCV)
Material	brass
Surface	tin-plated
Operating temperature [°C]	-5 ÷ +60

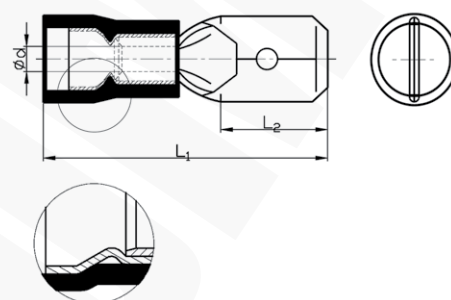

Type	Index Ergom	Cross-section [mm²]	Insulation colour	Size	d	L ₁	L ₂	Weight [kg]
WI 2,8-1/0,5 PCV (100 PCS)	E10KN-03020101901	0,75+1	red	2,8x0,5	1,7	18,7	6,5	0,04
WI 2,8-1/0,8 PCV (100 PCS)	E10KN-03020102001			2,8x0,8				0,05
WI 4,8-1/0,5 PCV (100 PCS)	E10KN-03020102101			4,8x0,5		19,2	7,0	0,06
WI 4,8-1/0,8 PCV (100 PCS)	E10KN-03020102201			4,8x0,8				0,07
WI 6,3-1/0,8 PCV (100 PCS)	E10KN-03020102501			6,3x0,8		20,8	7,6	0,08
WI 4,8-2,5/0,5 PCV (100 PCS)	E10KN-03020102301	1,5+2,5	blue	4,8x0,5	2,3	19,2	7,0	0,09
WI 4,8-2,5/0,8 PCV (100 PCS)	E10KN-03020102401			4,8x0,8		20,8		
WI 6,3-2,5/0,8 PCV (100 PCS)	E10KN-03020102601			6,3x0,8		21,4	7,6	0,1
WI 6,3-6/0,8 PCV (100 PCS)	E10KN-03020102701	4+6	yellow	6,3x0,8	3,4	24,0	7,6	0,16