

Fully insulated bullet connectors, WCI... type

FEATURES & BENEFITS

-  pin with long polyamide insulating sleeve, with Cu sleeve inside, for double crimping
-  insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk, facilitates cable installation
-  sleeve colours facilitate cross-section identification
-  to operate in wider temperature ranges than terminals with PVC insulation

LOGISTIC DATA

Quantity in package [pcs] 100

APPLICATION

Terminals with PC insulation available on request.

MECHANICAL DATA


Insulation	polyamide 6.6
Material	brass
Surface	tin-plated
Operating temperature [°C]	-30 ÷ +95

DIMENSIONS

L_1	25,0
L_2	9,2
d_2	4,0

NOTE!

Terminals with PC insulation available on request.

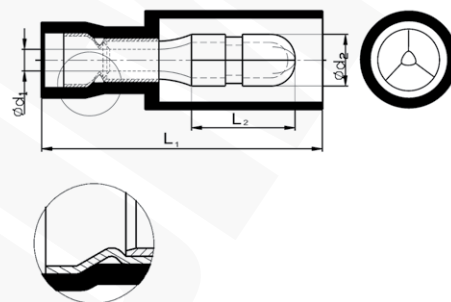

Type	Index Ergom	Cross-section [mm²]	Insulation colour	d_1	Weight [kg]
WCI 1/4 (100 PCS)	E10KN-03040300101	0,75÷1	red	1,8	0,07
WCI 2,5/4 (100 PCS)	E10KN-03040300201	1,5÷2,5	blue	2,4	0,09