

FEATURES & BENEFITS



blanking dies with manual drive, e.g. open-ended spanner, equipped with draw bolt




thrust bearing used facilitates hole cutting operations



draw mandrel included

NOTE!

Other sizes available on request.

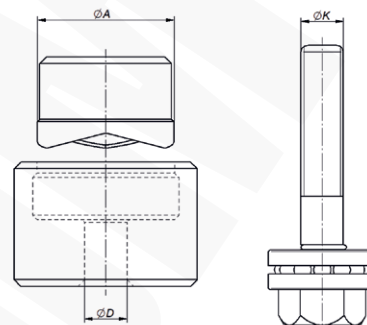

Type	Index Ergom	Spanner size	Internal thread of the punch K	Diameter of the hole to be cut A [mm]	Diameter of the through hole D [mm]
NW 12,2/ M12	E06WD-01020110050	17	3/8" UNF	12,2	9,55
NW 15,4/PG9	E06WD-01020110100	17	3/8" UNF	15,4	9,55
NW 16,2/M16	E06WD-01020110200	17	3/8" UNF	16,2	9,55
NW 18,8/PG11	E06WD-01020110300	17	3/8" UNF	18,8	9,55
NW 20,7/PG13 /M20	E06WD-01020110400	17	3/8" UNF	20,7	9,55
NW 22,8/PG16	E06WD-01020110500	17	3/8" UNF	22,8	9,55
NW 25,5/M25	E06WD-01020110600	17	3/8" UNF	25,5	9,55
NW 28,6/PG21	E06WD-01020110700	17	3/8" UNF	28,6	9,55
NW 30,5/M30	E06WD-01020110730	17	3/8" UNF	30,5	9,55
NW 32,5 / M32	E06WD-01020110750	17	3/8" UNF	32,5	19,05
NW 37,4/PG29	E06WD-01020110800	27	3/4" UNF	37,4	19,05
NW 40,5 / M40	E06WD-01020110850	27	3/4" UNF	40,5	19,05
NW 47,5/PG36	E06WD-01020110900	27	3/4" UNF	47,5	19,05
NW 50,5 / M50	E06WD-01020110950	27	3/4" UNF	50,5	19,05
NW 54,5/PG42	E06WD-01020111000	27	3/4" UNF	54,5	19,05
NW 59,8/PG48	E06WD-01020111100	27	3/4" UNF	59,8	19,05
NW 63,5 / M63	E06WD-01020111200	27	3/4" UNF	63,5	19,05