

Copper grounding braids, PU type

FEATURES & BENEFITS


- ☒ copper braids
- ☒ high mechanical strength and flexibility
- ☒ for protective and/or equipotential connections
- ☒ other sizes available on request

MECHANICAL DATA

Material tinned copper braid terminated with tinned copper lugs

NOTE!

At the customer's request, we manufacture copper grounding braids in accordance with the provided drawings.

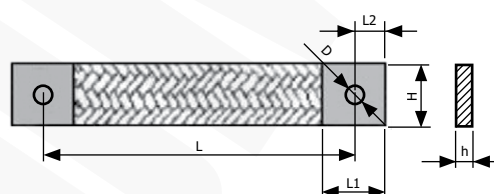

Type	Index Ergom	Cross-section [mm²]	H	D	h	L	L1	L2
PU620/6	R30RS-04050000101	6	16	6,5	2	200	17	5,6
PU1017/6	R30RS-04050000151	10	16	6,5	2	170	17	5,6
PU1620/8	R30RS-04050000301	16	19	8,5	3	200	19	10
PU2520/8	R30RS-04050000401	25	20	8,5	3,5	200	20	10
PU3520/8	R30RS-04050000501	35	20	8,5	4	200	20	10
PU5020/8	R30RS-04050000601	50	28	8,5	4,5	200	28	14