

Grounding clamps, OU 18-60, OU 60-120 type

FEATURES & BENEFITS

-  stainless-steel ties
-  clamp for direct mounting of up to 16 mm² cross-section cords
-  easy installation and guarantee of good electric and mechanical connection


Earthing clamps are clenched on 18-165 mm pipes with 2 M6 screws. One of the screws works also as a clamp to copper wires of up to 16 mm² cross-section. Earthing clamps are used for equalizing potential in buildings, ensuring electric shock protection works properly.

MECHANICAL DATA

Material	stainless steel
Cable cross-section [mm²]	16

CERTIFICATES & STANDARDS

Standards	EN 60947-7-2; Safety sign "B"
------------------	-------------------------------

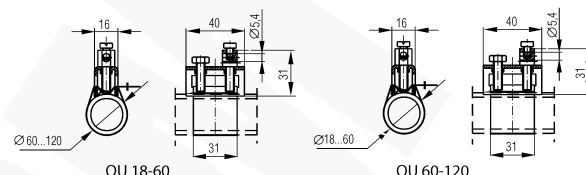

Type	Index Ergom	Pipe diameter range [mm]	Quantity in package [pcs]	Weight [g]
OU 18-60 (8 PCS)	R33RA-04030100103	18÷60	8	424
OU 60-120 (4 PCS)	R33RA-04030100203	60÷120	4	232