

Heat-shrink insulating tubes, RIS type

FEATURES & BENEFITS



full type examination performed by IEN Wrocław



high dielectric strength



used for LV busbar insulation

LOGISTIC DATA

Quantity in package [m] 15

APPLICATION

Insulation of busbars in switchboards. RIS tubes enable to decrease the distances between busbars – and at the same time decrease dimensions, protect from corrosion, help to avoid accidental short-circuits and increase personnel work safety.

MECHANICAL DATA

Material cross-linked polyethylene

Operating temp. [°C] -55 ÷ +125

Wall thickness on full shrinkage - s [mm] 1,0

Max. shrinking temperature [°C] +200

ELECTRICAL DATA


Rated voltage [kV] 1

Volume resistivity [Ωcm] 1,0 x 10¹⁵

1-minute strength [kV AC] 42

Dielectric strength [kV/mm] 30

Impulse withstand strength [kV, peak] 75

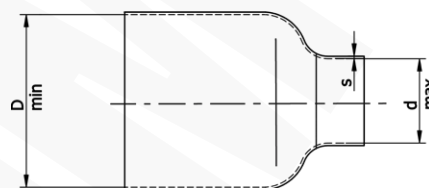

Type	Index Ergom	Colour	d	D
RIS-1 60/25 RD (15 M)	R32RZ-07020100681	red	31	60
RIS-1 70/28 GR (15 M)	R32RZ-07020100801	green	34	70
RIS-1 100/40 YL (15 M)	R32RZ-07020101001	yellow	49	100
RIS-1 100/40 GR (15 M)	R32RZ-07020101101	green	49	100
RIS-1 100/40 VL (15 M)	R32RZ-07020101201	violet	49	100

s - Wall thickness on full shrinkage - s [mm], d - Inside diameter on full shrinkage d [mm], D - Inside diameter before shrinkage D [mm]