

FEATURES & BENEFITS



fast installation with bolts or tapping screws



membrane facilitates cable routing in glands



high degree of protection against dust and water penetration (IP 65)



complete set for standard small electric system designs




LOGISTIC DATA

Type	FL 13Z1 (10 PCS)
Index Ergom	R30RS-04070010101
Quantity in package [pcs]	10

MECHANICAL DATA

Material	polypropylene reinforced with glass fibre and TPE elastomer, halogen-free
Operating temp. [°C]	-20 ÷ +125
Assembly	Set, ZNFL type (bolts + nuts)
Cable diameter [mm]	1x 6-13mm (M20), 10x 4-10mm 2x6÷13 mm, 20x4÷10 mm

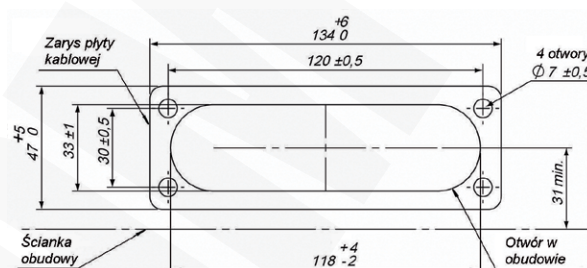

CERTIFICATES & STANDARDS

IP degree of protection	IP65 (with and without cables installed)
Standards	EN 60529:1991+A1; EN 60670-1:2005