

FEATURES & BENEFITS

- ☒ fast installation with bolts or tapping screws
- ☒ membrane facilitates cable routing in glands
- ☒ high degree of protection against dust and water penetration (IP 65)
- ☒ complete set for standard electric system designs

LOGISTIC DATA


Quantity in package [pcs]	10
---------------------------	----

MECHANICAL DATA

Material	polypropylene reinforced with glass fibre and TPE elastomer, halogen-free
Operating temp. [°C]	-20 ÷ +125
Assembly	Set, ZNFL type (bolts + nuts)

CERTIFICATES & STANDARDS

IP degree of protection	IP65 (with and without cables installed)
Standards	EN 60529:1991+A1; EN 60670-1:2005

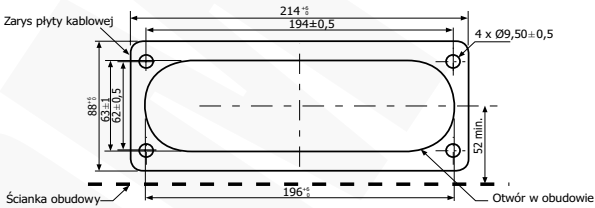

Type	Index Ergom	Cable diameter [mm]
FL 21Z1 (10 PCS)	R30RS-04070000101	2x8÷17 mm, 2x5÷10 mm (M16), 2x6÷13 mm, 20x4÷10 mm
FL 21Z2 (10 PCS)	R30RS-04070000201	2x8÷17 mm, 2x6÷13 mm, 30x4÷10 mm
FL 21Z3 (10 PCS)	R30RS-04070000301	18x7÷14 mm, 10x4÷10 mm