


FEATURES & BENEFITS

- ☒ clamps made of high-quality brass
- ☒ mounting on TSE 35 rail
- ☒ pressure screws made of galvanized steel
- ☒ cords up to 35 mm² can be connected directly

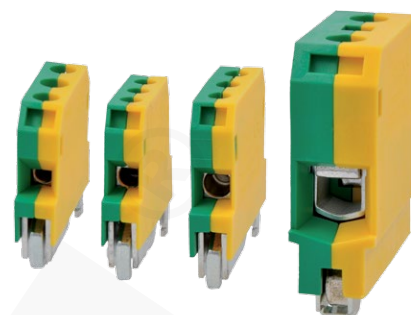

CE

MECHANICAL DATA

Colour	yellow-green
Body material	polyamide
Bolt material	galvanized steel
Clamp material	tin-plated brass
Operating temperature [°C]	-25 ÷ +100

ELECTRICAL DATA

Rated insulation voltage U _i [V]	690
Electric strength [kV/mm]	6

CERTIFICATES & STANDARDS

Flammability class	UL 94 V2
Standards	IEC 60947-7-2

Type	Index Ergom	Circuit insulation length [mm]	Nominal cross-section [mm ²]	Recommended tightening torque [Nm]
ZUO 4/35 (50 PCS)	R33RA-01020100323	6	4	0,8
ZUO 10/35 (50 PCS)	R33RA-01020100423	10	10	1,2
ZUO 16/35 (50 PCS)	R33RA-01020100503	11	16	2,0
ZUO 35/35	R33RA-01020100601	13	35	2,5