

FEATURES & BENEFITS



popular steel cable ties with "ladders" for wide range of cable bundle diameters



for difficult climatic or environmental conditions

LOGISTIC DATA

Quantity in package [pcs] 100

There is an elastic toothed latch in the buckle. After tightening of the tie, the teeth fall into the holes in the tie, so it is impossible to pull it back. The strip is perforated over the whole length so it is possible to tighten the bundles of various diameters. The solution is designed also for outdoor applications, possibly in marine conditions. Permissible operation in the mining and chemical industry.

MECHANICAL DATA


Material	acid-proof steel 316 type acc. to AISI/ASTM
Halogen-free	yes
Operating temperature [°C]	-80 ÷ +540
Tool type	MK-SB

DIMENSIONS

L1	14
S	0,28

CERTIFICATES & STANDARDS

Standards EN IEC 62275:2019

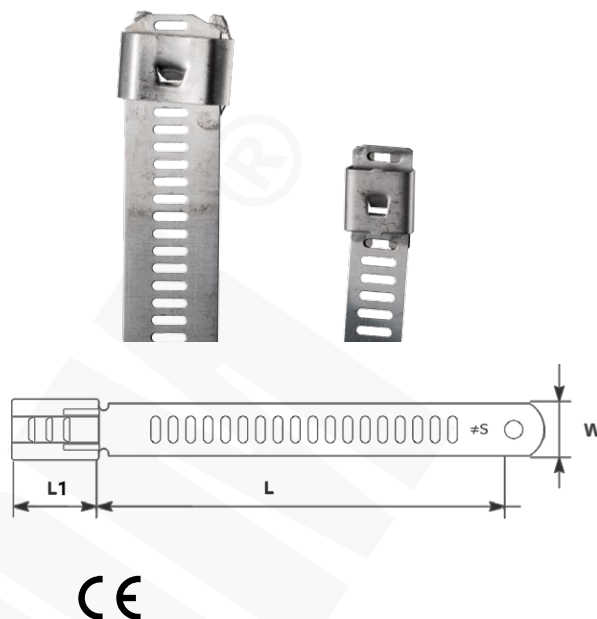

Type	Index Ergom	Tensile strength, min. [daN]	Max. bundle dia. [mm]	L	W
TST 15/7 (100 PCS)	E01TK-03010100101	34	48	175	7,00
TST 22/7 (100 PCS)	E01TK-03010100201	34	71	231	7,00
TST 30/7 (100 PCS)	E01TK-03010100301	34	96	310	7,00
TST 45/7 (100 PCS)	E01TK-03010100401	34	129	472	7,00
TST 60/7 (100 PCS)	E01TK-03010100501	34	193	604	7,00
TST 15/12 (100 PCS)	E01TK-03010100601	45	48	175	12,00
TST 22/12 (100 PCS)	E01TK-03010100701	45	71	231	12,00
TST 60/12 (100 PCS)	E01TK-03010101001	45	193	604	12,00

